


Engineering structures

Box part of support walls U3 | 61 Uherský Ostroh

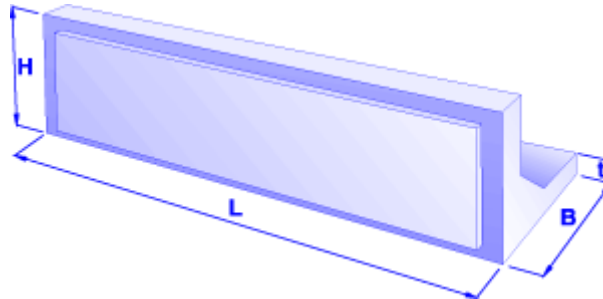

Key Features

Trademark	Dimensions (cm)			Concrete Class	Volume (m ³)	Weight (kg)
	L	B	H			
IZT 57/10	298	91	76	C 30/37-XF4	0,8500	2130

Usage

For construction of mounted low and medium high support walls of inclinations 5 : 1, 10 : 1, 20 : 1. They are designed for dead load of elements and filling earth, for load by the basic load train ČSD T, the standard load of which is given by a set of axle forces 4 x 312.5 kN and by the uniform load 100 kNm⁻¹. The face is aesthetically finished. The element U3 is the last element of the support wall under a monolithic concrete moulding. The element U4 is laid on the foundation base as first. Construction of constituent box parts is performed in accordance with the type document approved by FMD Dept. 6, ref. No. 16364/1984-06 on September 10th, 1984 issued by the company SUDOP Prague Inc.