


Railway structures

Inner paving panel | 31 Doloplazy

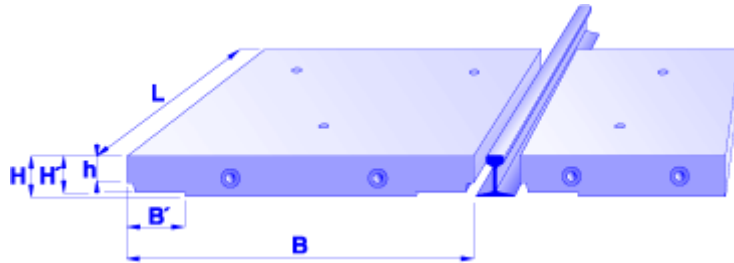

Key Features

Trademark	Dimensions (cm)					Concrete Class	Volume (m ³)	Weight (kg)
	L	B	H	B_1	H_1			
IZX 512/10	123	128	15	21,5	13,5	C 35/45-XF4	0,2201	585

Usage

For paving of railroad crossings of 3rd class roads and lower, of field roads and for paving of service tracks and siding rails with gauge of 1,435 mm. They are laid on through-put wood supports along rails inside the track. The panels are equipped with holes for junction by inserting of short bolts for the purpose of increasing stability of elements. They are designed for load 110 kN per axle.