


Railway structures

Sleeper PB76 for gauge 760 mm | 31 Doloplazy

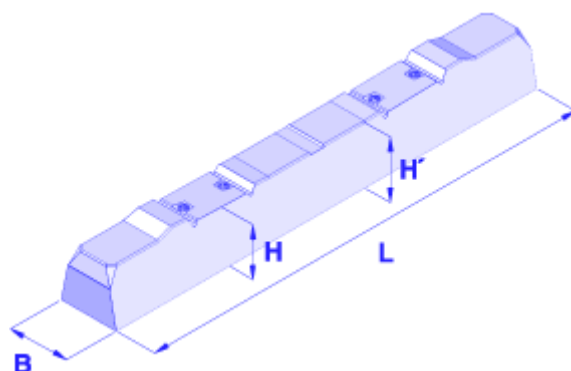

Key Features

Trademark	Dimensions (cm)				Concrete Class	Volume (m ³)	Weight (kg)
	L	B	H	H_1			
APP 130-19	184	24	21	23	C 45/55 XF1	0,076	190

Usage

Production and delivery of concrete prestressed sleepers type BP76 with flexible baseless fastening of Vossloh rails with a gauge of 760 mm intended for installation in narrow-gauge railway tracks.

Sleeper with baseless fastening W 14 with storage area inclination 1:40

Note:

The sleeper is designed for the division of sleepers 600 - 690 mm, the minimum radius of the directional arc is 70 m.

Max. gauge extension 14 mm. Rail type 49E1.

Speed 80 km / h - axle weight 18 t (YES), 22.5 t (YES), 25 t (NO)