


Railway structures

Tram panel DZP 220/396-P halved | 61 Uherský Ostroh

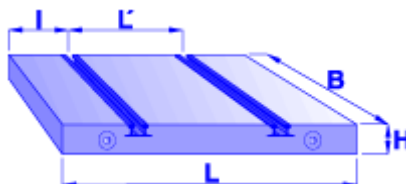

Key Features

Trademark	Dimensions (cm)					Concrete Class	Volume (m ³)	Weight (kg)
	L	B	H	L_1	L_2			
IZX 245/10	194	220	20	94	50	C 30/37-XF4	0,8536	2110

Usage

For laying and fastening of railroad spans of tram roads. The grooves formed by a pair of rails for mining and field railways 80/14 serve for fastening of rails type NP 3; NP 4; NT 1; NT 2. The panels designated No. 3, 4 serve for laying of tram railroad spans on crossings and in curves up to min. R = 25 m.