
Railway structures

Tramway realignment support R01 | 61 Uherský Ostroh

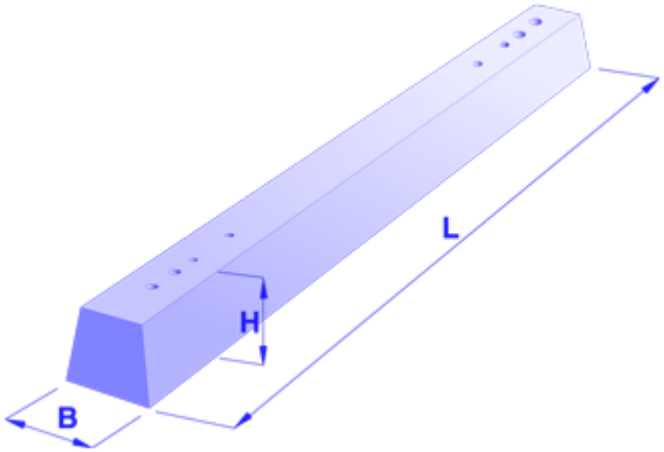

Key Features

Trademark	Dimensions (cm)			Concrete Class	Volume (m^3)	Weight (kg)
	L	B	H			
ABX 100-19	240	24	19,5	C 45/55-XF1	0,0920	225

Usage

The tramway realignment support R01 (B 03 DPR) is used as an auxiliary component for building tramways using the Vossloh W-Tram mounting system. This type of support is only used to secure the gauge size during tramway construction. It is also usable for height realignment of the track grid (M24 thread).
The component is made of fibre concrete.
Use of the realignment support for other purposes is prohibited.
W-tram mounting for NT1/NT3 with no bearing surface inclination.